




Excalibur Crossbow String & Brace Height Guide

Crossbow	Length	Part #	Brace
Axe/Mag 340, Mag Air, Assassin Extreme, RevX, Suppressor Extreme	26 1/8"	1993	2.5" – 3"
Micro Series (308, 315, 355, Suppressor 355, New Micro 335, Assassin 360, 340TD, 360TD, Assassin 400TD, Suppressor 400TD, TwinStrike*, Twinstrike Tac2*, Micro 380*, Extreme*)	26 1/8"	1993 *10602	1.5"-2"
Micro 335 (original 3-degree riser)	26 1/8"	1993	1"-1.5"
Matrix Bulldog 400, Matrix Bulldog 380, Matrix Bulldog 330	31 1/8"	1992	1.5"-2"
Grizzly, GRZ2, Cub, Bulldog 440, Assassin 420TD	31 1/8"	1992	1"-1.5"
Matrix Series (405, 380, 355, 330, 310, Sapphire, G340)	31 1/8"	1992	.5"-1"
Traditional Series – Mag-Tip Limbs (Equinox, Exomax, Exomag, Vortex, Exocet, Vixen, Axiom, Ibex, Phoenix, Eclipse)	35 1/2"	1994 1989	.5"-1"
Traditional Series – Carved-Tip Limbs (Exocet, Exomag, Exomax, Vixen, Wolverine)	35 1/2"	2010	.5"-1"

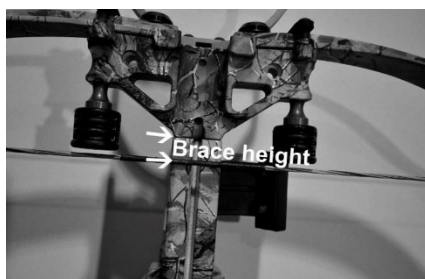

Note: Brace height is measured from the joint where the riser meets the rail. The string should never touch the suppressor pads. If it does, adjustments can be made by simply twisting the string counterclockwise until the correct brace height is achieved. You can't over-twist the string. If the brace height is slightly more than stated it is still OK to use and will stretch with use.