




## Excalibur Crossbow String & Brace Height Guide

Crossbow	Length	Serving	Material	Part #	Brace
Micro 308, 315, 355, Suppressor 355, New Micro 335, Assassin 360, Micro 360TD, Assassin 400TD, Suppressor 400, Micro 340TD, TwinStrike (x2)	26 1/8"	End – BCY 3D Center - .036 Angel Majesty	BCY Force 10	1993	1.5"-2"
Micro 335 (original 3-degree riser), MAG 340	26 1/8"	End – BCY 3D Center - .036 Angel Majesty	BCY Force 10	1993	1"-1.5"
Matrix Bulldog 400, Matrix Bulldog 380, Matrix Bulldog 330	31 1/8"	End – BCY 3D Center - .036 Angel Majesty	BCY Force 10	1992	1.5"-2"
Grizzly, GRZ2, Cub, Bulldog 440, Assassin 420TD	31 1/8"	End – BCY 3D Center - .036 Angel Majesty	BCY Force 10	1992	1"-1.5"
Matrix Series (405, 380, 355, 330, 310, Sapphire, G340)	31 1/8"	End – BCY 3D Center - .036 Angel Majesty	BCY Force 10	1992	.5"-1"
Traditional Series – Mag-Tip Limbs (Equinox, Exomax, Exomag Vortex, Exocet, Vixen, Axiom, Ibex, Phoenix, Eclipse)	35 1/2"	End – BCY 3D Center - .036 Angel Majesty	BCY B55 Dacron	1994	.5"-1"
			BCY Force 10	1989	
Traditional Series – Carved-Tip Limbs (Exocet, Exomag, Exomax, Vixen, Wolverine)	35 1/2"	End – BCY 3D Center - .036 Angel Majesty	BCY B55 Dacron	2010	.5"-1"

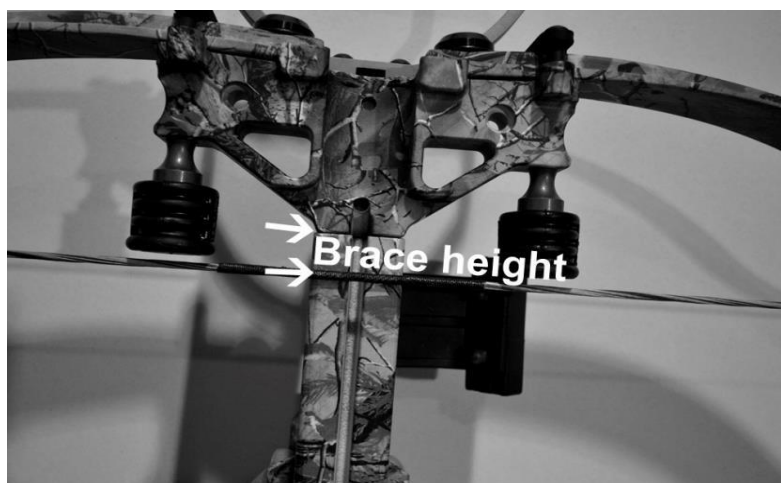

Note: Brace height is measured from the joint where the riser meets the rail. The string should never touch the suppressor pads. If it does, adjustments can be made by simply twisting the string counter clockwise until the correct brace height is achieved. You can't over-twist the string. If the brace height is slightly more than stated it is still OK to use and will stretch with use.